

GREEN LABEL

GREEN LABEL SPEAKERS ARE PRIMED FOR HIGH-POWER ROCK PERFORMANCES, WHERE A FULL-BODIED, WARM, DEFINED TONE IS ESSENTIAL.




BN15-400X

BASS GUITAR LOUDSPEAKER



Frequency Response and Impedance Curves

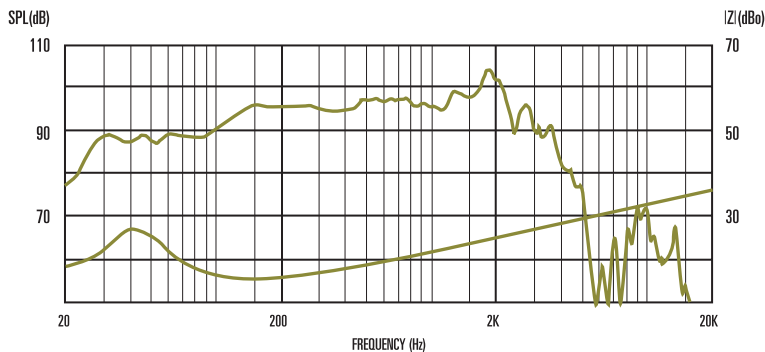

General Parameters

Nominal diameter	381mm/15in
Power Rating (rms)	400W
Nominal impedance	8Ω
Voice coil diameter	76.2mm/3in
Magnet type	Neodymium
Sensitivity	95dB
Frequency range	38-3000Hz
Coil material	Copper
Former material	Polyimide
Cone material	Kevlar loaded paper
Surround material	Cloth-sealed
Xmax	4mm/0.15in
Gap depth	10mm/0.39in
Voice coil winding width	18mm/0.70in

Small Signal Parameters

D	0.33m/12.99in
Fs	44.9Hz
Mmd	74.71g/2.64oz
Mair	14.15g/0.499oz
Qms	3.27
Qes	0.72
Qts	0.59
Re	5.34Ω
Vas	146.48lt/5.17ft ³
Bl	13.59Tm
Cms	0.14mm/N
Rms	7.66kg/s
Le	1.22mH

Mounting Information

Diameter	385mm/15.2in
Overall depth	152mm/6in
Cut-out diameter	351mm/13.8in
Mounting slot dimensions	9.2 x 6.2mm/0.36 x 0.24in
Number of mounting slots	8
Mounting slot PCD	369mm/14.5in
Unit weight	2.6kg/5.7lb